


Velocitykvm-8

Multi-Mode Fiber Extension System – Dual-link DVI

QUICK START GUIDE

The Thinklogical™ **Velocitykvm-8** Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by three multi-mode fiber optic cables (or by one to three optional single-mode fibers). The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The **Velocitykvm-8** supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports, USB 1.1 and USB 2.0 (high speed up to 480Mbps).


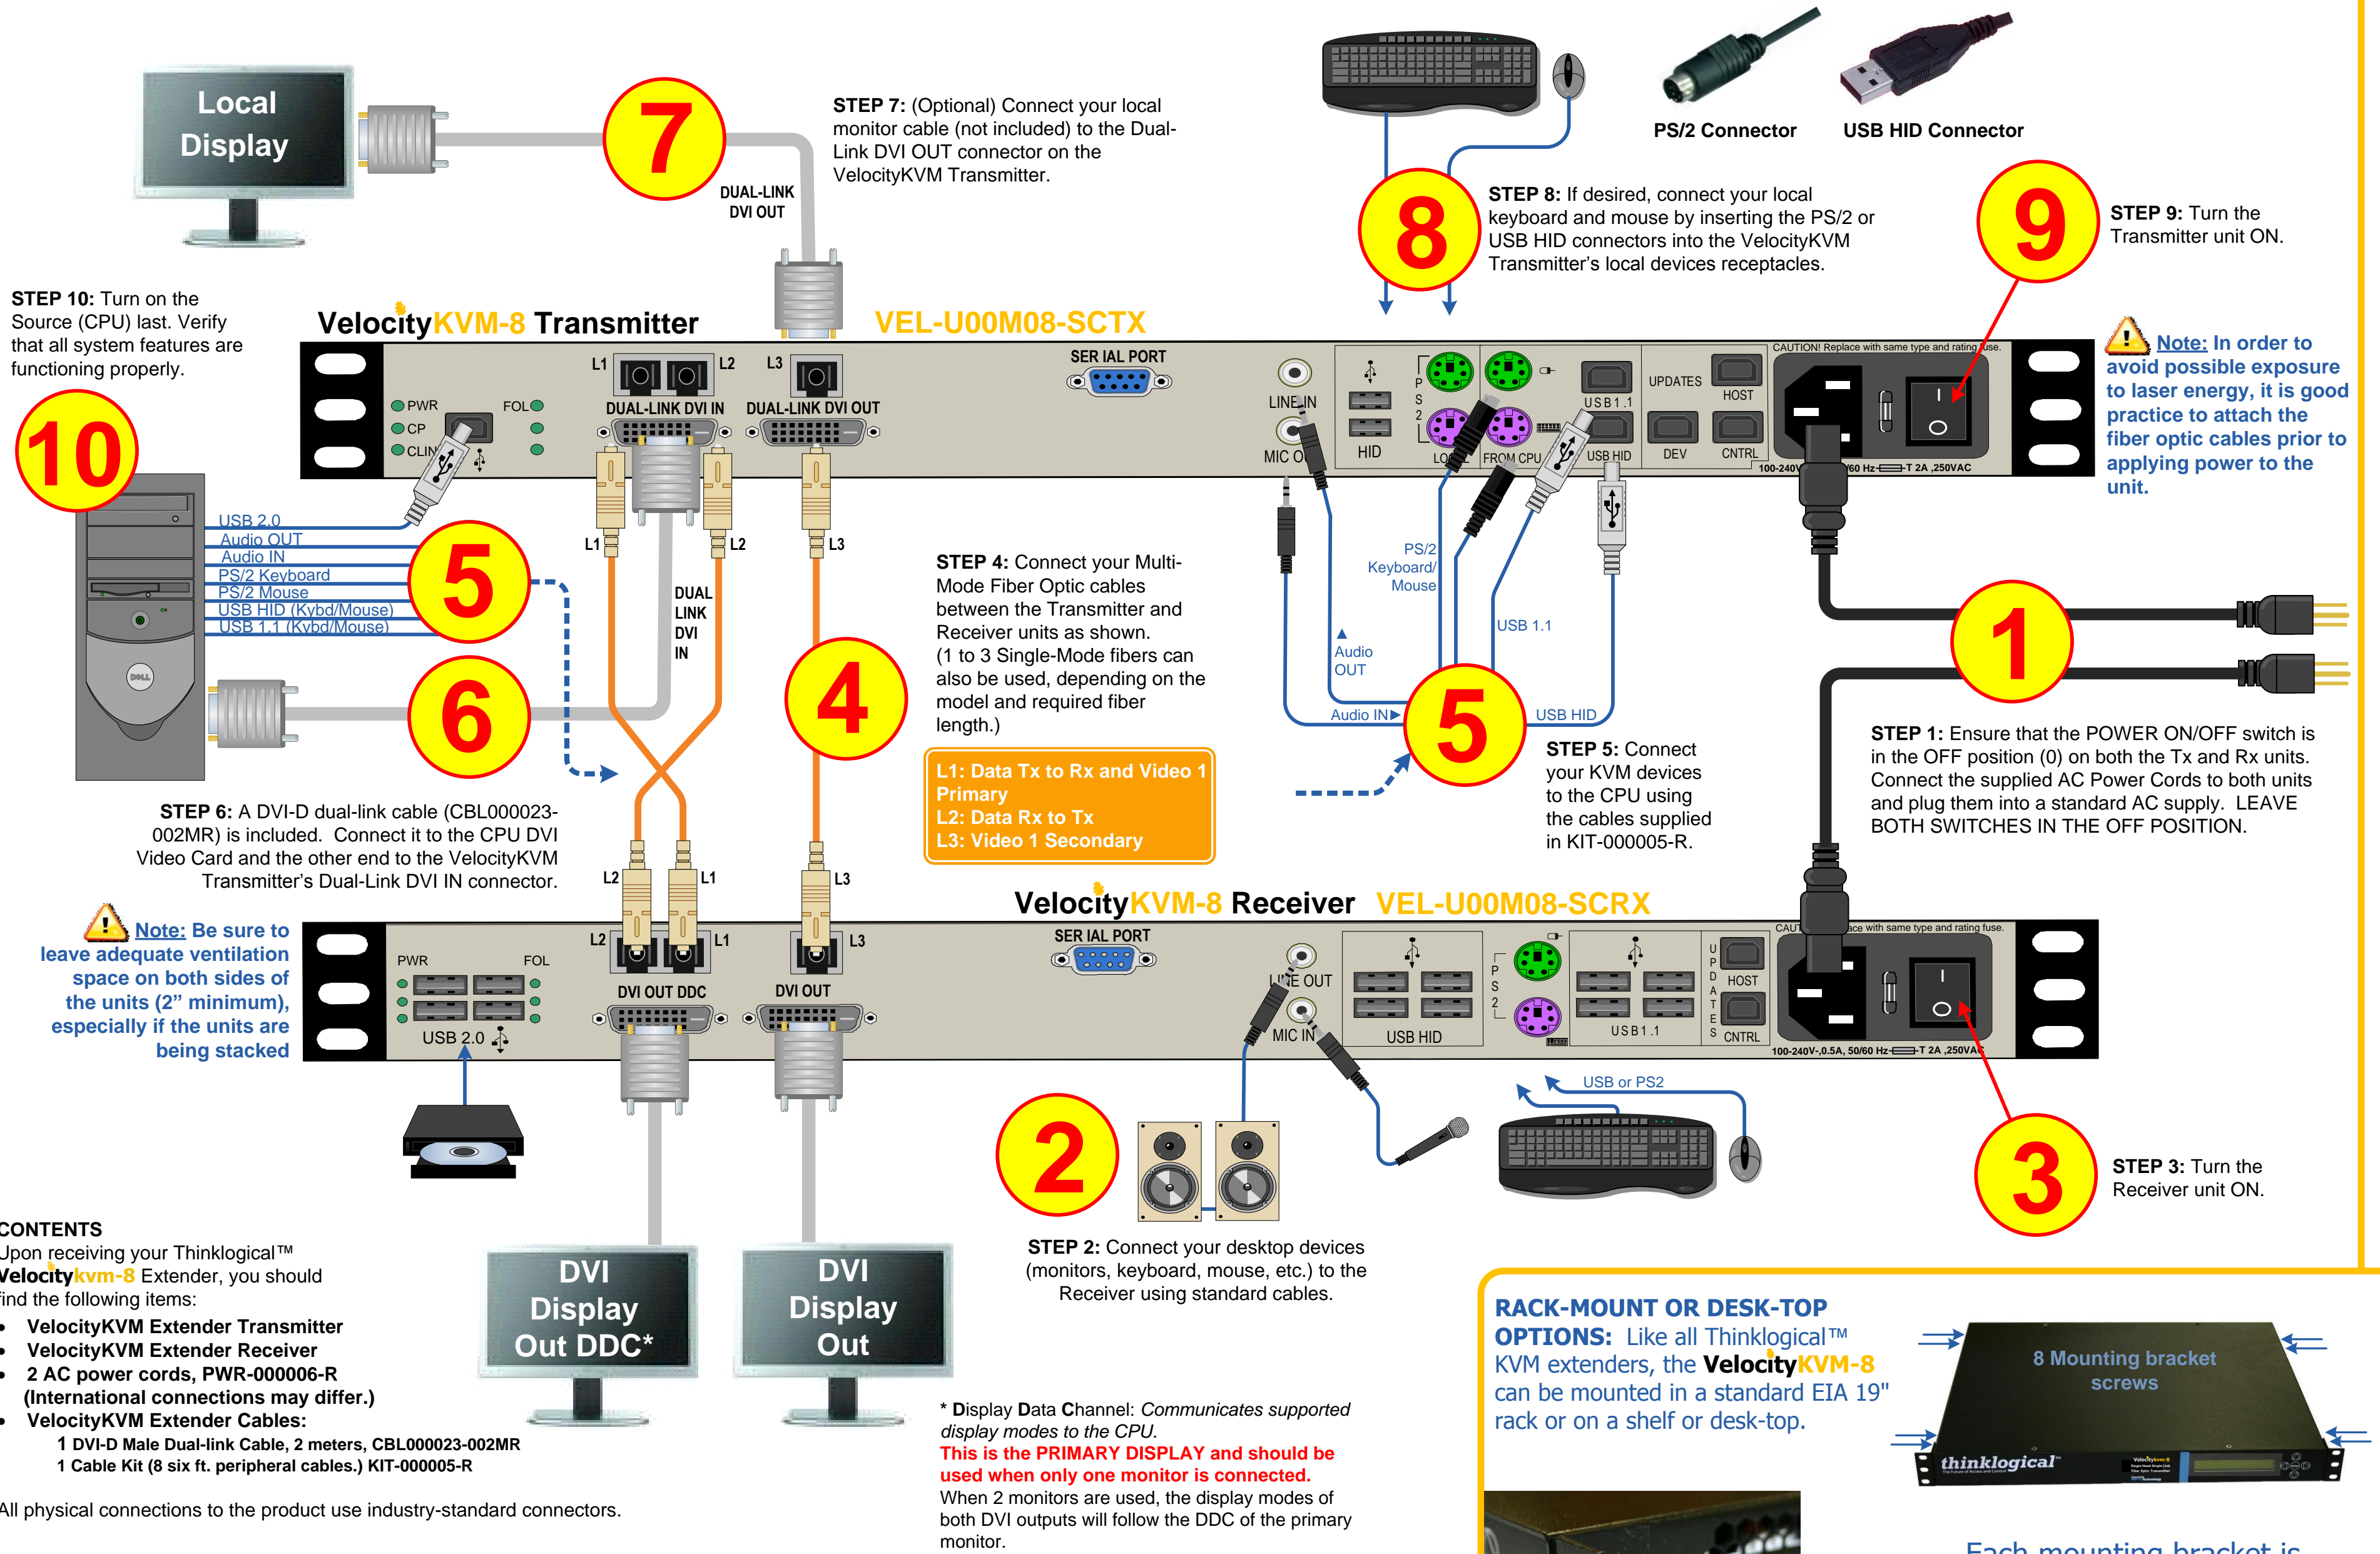


- CONTENTS**
- Upon receiving your Thinklogical™ **Velocitykvm-8** Extender, you should find the following items:
- VelocityKVM Extender Transmitter
 - VelocityKVM Extender Receiver
 - 2 AC power cords, PWR-000006-R (International connections may differ.)
 - VelocityKVM Extender Cables:
 - 1 DVI-D Male Dual-link Cable, 2 meters, CBL000023-002MR
 - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R


All physical connections to the product use industry-standard connectors.

* Display Data Channel: Communicates supported display modes to the CPU. **This is the PRIMARY DISPLAY and should be used when only one monitor is connected.** When 2 monitors are used, the display modes of both DVI outputs will follow the DDC of the primary monitor.

RACK-MOUNT OR DESK-TOP OPTIONS: Like all Thinklogical™ KVM extenders, the **VelocityKVM-8** can be mounted in a standard EIA 19" rack or on a shelf or desk-top.

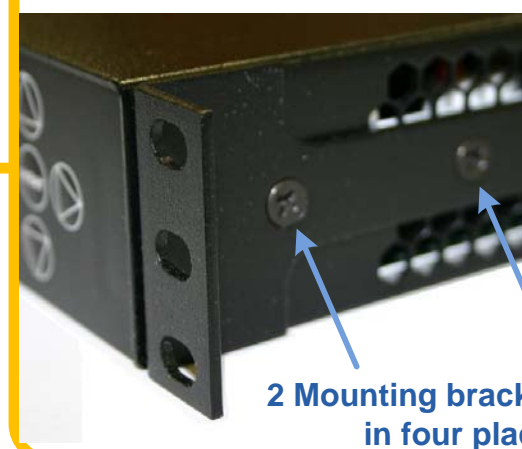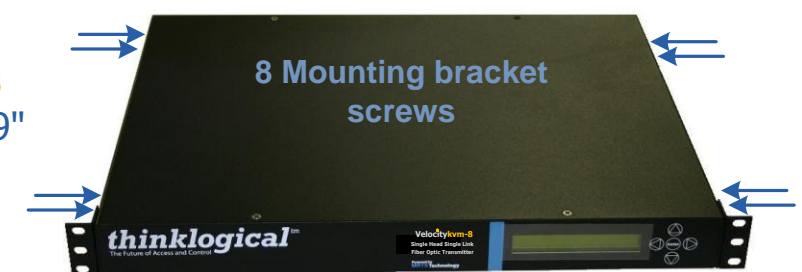

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting.

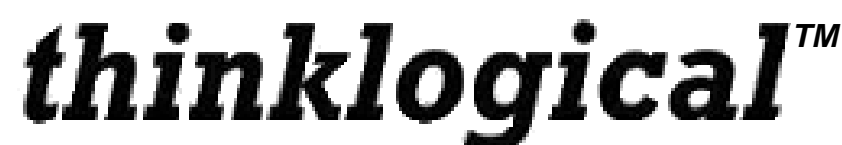

PHONE: 1-800-291-3211
 WEBSITE: www.thinklogical.com
 EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of Thinklogical products.